


# Glassforce 2300 Bifolding Doors




## Product Features

- Ideal for creating wide openings for both interior and exterior situations.
- Openings up to 6m in each direction so can facilitate up to 12m openings.
- Suitable for 10mm -12mm Toughened Safety Glass.
- Can be centrally hung or side hung to reduce the amount of storage space required.
- Maximum door sash up to 3000 x 1000mm or 80kg.
- Continuous support for the glass doors with a complete rail system which requires no holes in the glass.
- A clear floor passageway is possible with no track on the floor.
- Top and Bottom Rails have the ability to add brush seals to reduce wind and sound intrusion.
- Can be configured for a range of opening formats including an externally opening door.
- Manufactured from aluminium and available in a range of finishes.

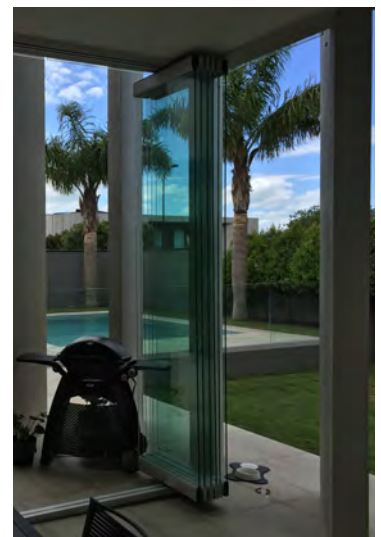

# Glassforce 2300 Bifolding Doors

## Typical Layouts - Side Hung



### Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.

**Max Door Size:** 2800 x 900mm

## Typical Layouts - Centrally Hung



### Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.

**Max Door Size:** 3000 x 1000mm




# Glassforce 2300 Bifolding Doors



## Product Features

- Ideal for creating wide openings for both interior and exterior situations.
- The smooth sliding operation of the Vetro Slide-Fold-Stack System opens up existing rooms for expanding the area, or to close it off as required.
- Stacks conveniently out of the way when opened.
- Created using Patch Fittings to provide a maximum clear visual opening.
- Openings up to 6m in each direction, so can facilitate up to 12m openings.
- Suitable for 10mm -12mm Toughened Safety glass.
- Maximum door sash up to 2400 x 900mm or 70kg with a single top and bottom Patch, or 3000mm x 1000mm with an additional centre patch
- A guide rail system in the floor provides additional support and security.
- Can be configured for a range of opening formats including an independently opening fixed door.
- Manufactured from aluminium and available in a range of finishes.

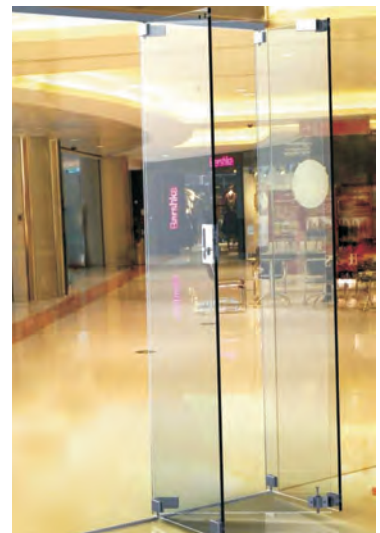

# Glassforce 2300 Bifolding Doors

## Typical Layouts



### Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.

### Max door size

3000 x 1000mm with an additional centre patch,  
2400 x 900mm with a single top and bottom patch.

